



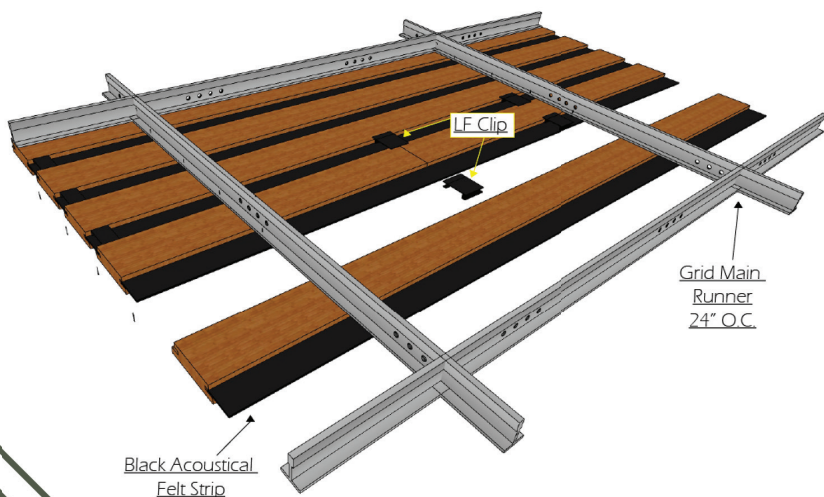

# REDBUD ARCHITECTURAL SYSTEMS

918.357.2859 SALES@REDBUDASI.COM  
WWW.REDBUDASI.COM

Solid wooden slats are invisibly suspended on a fixed module suspension system of grid runners and clips. Sound absorbant black acoustial felt is factory-installed to each slat - filling the joint between each slat.

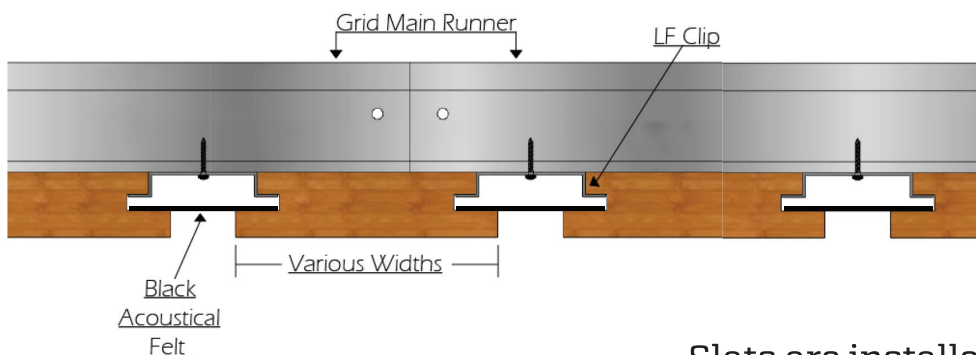


Slats are installed end-to-end using our black Linear Felt Clips- forming a continuous wood appearance along the space. Slats are typically 3/4\"

LO2 - Felt LINEAR OPEN



# REDBUD ARCHITECTURAL SYSTEMS

918.357.2859 SALES@REDBUDASI.COM  
WWW.REDBUDASI.COM

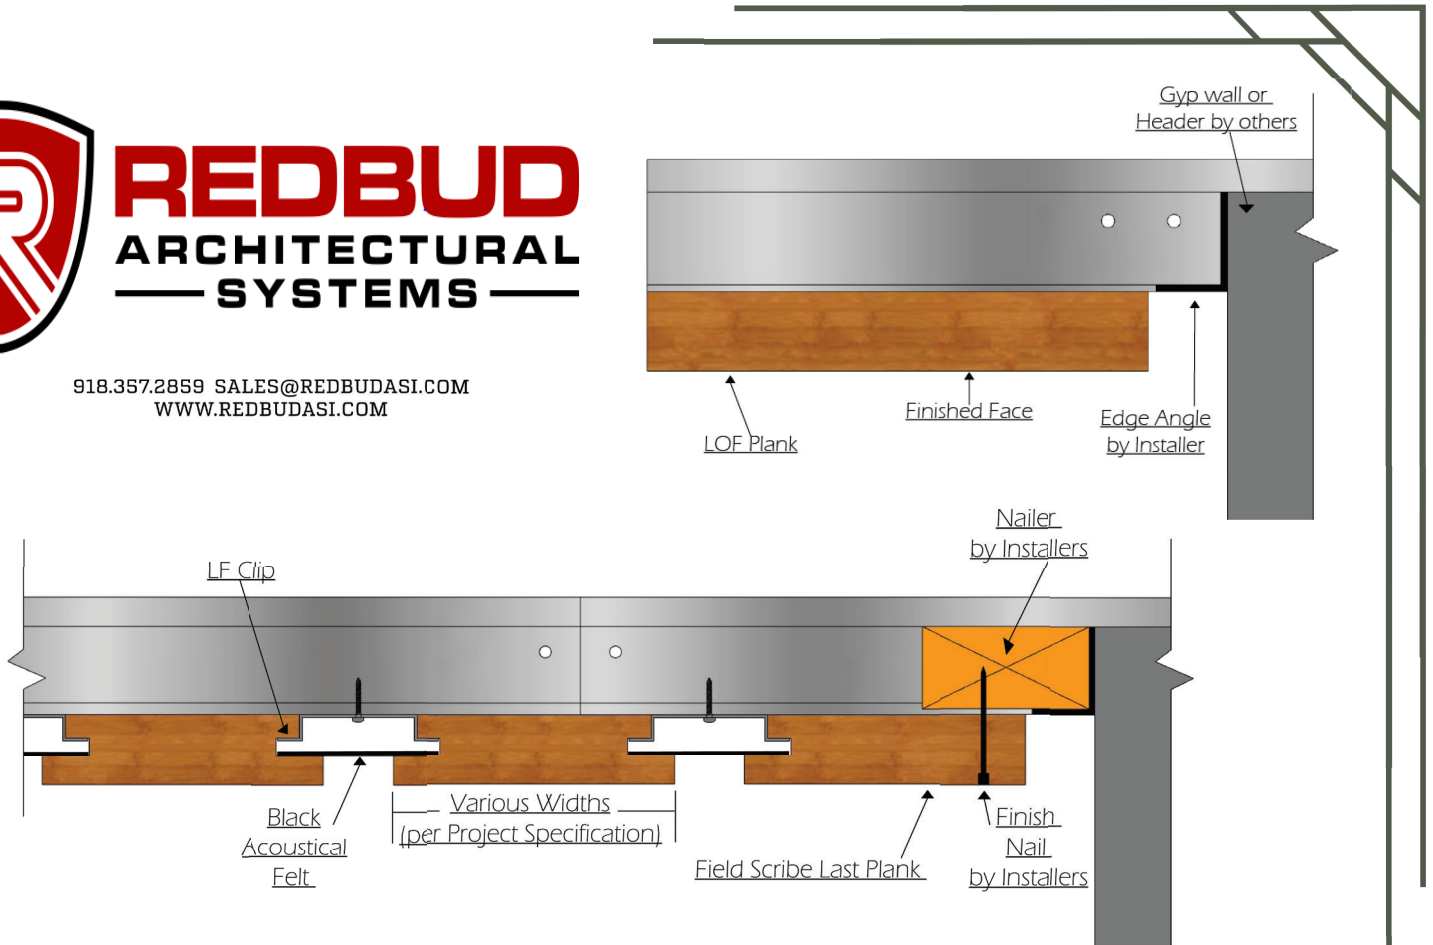

## ACOUSTICS

The LO2-Felt Linear Open System has an NRC rating of

## CUSTOMIZATION

The LO2-Felt Linear Open System can be custom manufactured in a variety of blade sizes, lengths, and widths, in any commercially available solid wood species or veneer color. Color-matching and custom finishes are also available.

## STORAGE AND ACCLIMATIZATION

All Linear System material must be stored and installed only in a controlled interior environment (relative humidity range 25% - 55% maximum - temperature between 60° - 80° - not to exceed 86°). All windows, doors and wet work must be complete before installation.

Material should only be installed after reaching equilibrium moisture content.

## FIRE RATING

The LO2-Felt Linear System veneered components can be treated with Fire Retardant chemicals to achieve Class A fire rating compliance.

## WARRANTY

All materials produced by Redbud Architectural Systems are guaranteed against manufacturing defects for one year from the date of delivery. \*Due to the nature of wood stains, color matching can not be guaranteed.