


Providing the warm look of wood, plus an acoustical treatment, our RB Grille System are available with solid wood or wood veneer options.




Blade sizes range from 1 3/8" – 4" deep. Our panel width is determined by the project specifications. Solid wood panels are available with 4-10' lengths, and our veneer panels are offered in 8-12' lengths.

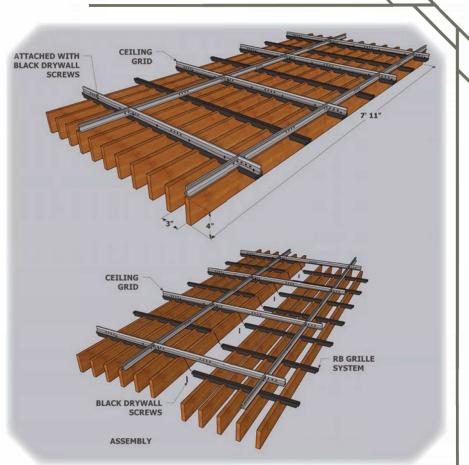


The RB Grille system blades are easily installed onto the runners with drywall screws and can be attached to walls using sheathing or furring strips.

\*See Baffle system for larger blade options and curved systems.



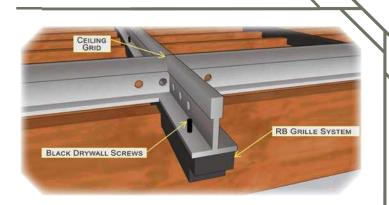

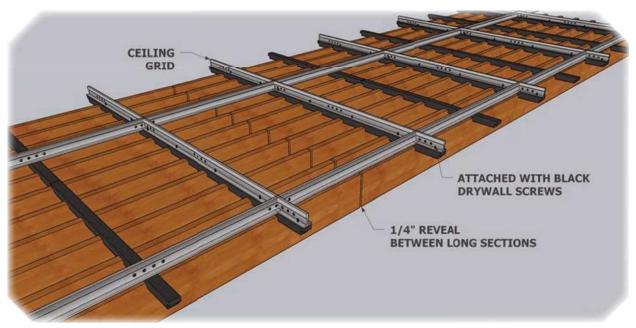

## Customization

The RB Grille System can be custom manufactured in a variety of blade sizes, lengths, and widths, in any commercially available solid wood species or veneer color. Color-matching and custom finishes are also available.

## Storage and Acclimatization

All Grille System material must be stored and installed only in a controlled interior environment (relative humidity range 25% - 55% maximum - temperature between 60° - 80° - not to exceed 86°). All windows, doors and wet work must be complete before installation.

Material should only be installed after reaching equilibrium moisture content.

## FIRE RATING

The RB Grille System Panels and components can be treated with Fire Retardant chemicals to achieve Class A fire rating compliance.

## Warranty

All materials produced by Redbud Architectural Systems are guaranteed against manufacturing defects for one year from the date of delivery. \*Due to the nature of wood stains, color matching can not be guaranteed.