



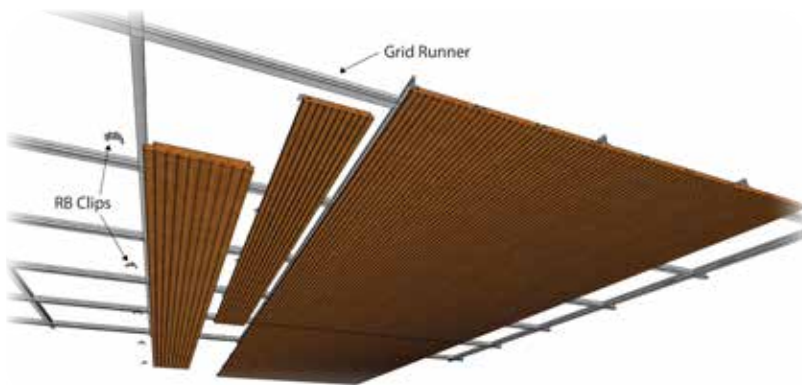

Combining exceptional acoustical performance with a fine grooved aesthetic - our RB Acoustiplanks provide a functional and elegant ceiling treatment.

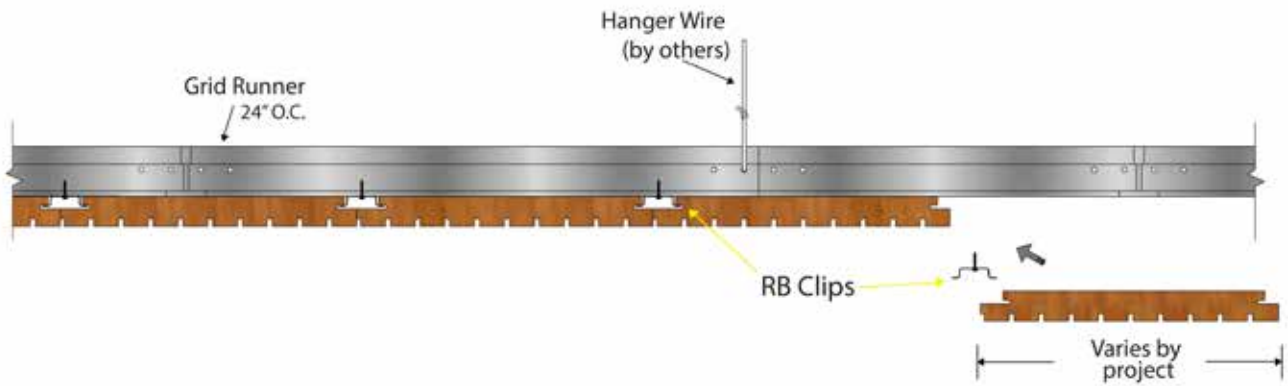

Acoustical wood planks are assembled tightly together on HD T-Grid using tongue & groove joinery and secured together with Z-Clips.

ACOUSTIPLANK SYSTEM






REDBUD
ARCHITECTURAL
SYSTEMS



Open Reveal



Cont. Wall Angle

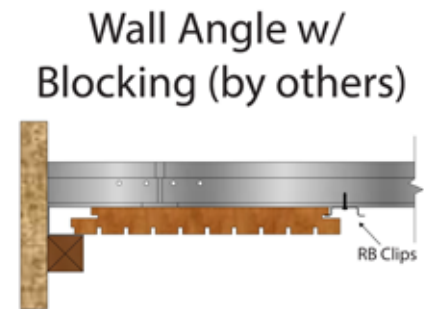

Wall Angle w/
Blocking (by others)

ACOUSTICS

The RB Acoustiplank System has an NRC rating of 0.55 (E-400-Mount)

CUSTOMIZATION

The RB Acoustiplank System can be custom manufactured in a variety of panel/blade sizes, lengths, and widths, in any commercially available solid wood species or veneer color. Color-matching and custom finishes are also available.

STORAGE AND ACCLIMATIZATION

All RB Acoustiplank System material must be stored and installed only in a controlled interior environment (relative humidity range 25% - 55% maximum - temperature between 60° - 80° - not to exceed 86°). All windows, doors and wet work must be complete before installation.

Material should only be installed after reaching equilibrium moisture content.

FIRE RATING

The RB Acoustiplank System veneered components can be treated with Fire Retardant chemicals to achieve Class A fire rating compliance.

WARRANTY

All materials produced by Redbud Architectural Systems are guaranteed against manufacturing defects for one year from the date of delivery. *Due to the nature of wood stains, color matching can not be guaranteed.

ACOUSTIPLANK SYSTEM

