





Providing the warm look of wood, plus an acoustical treatment, our RB Lay In Backer panels are available with solid wood or wood veneer options.

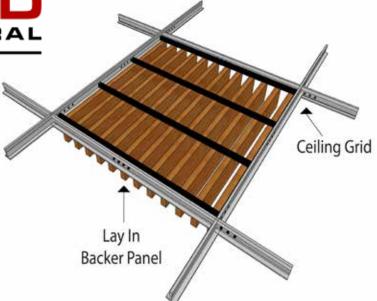

The Lay In Backer panels are factory assembled to "lay into" HD T-grid and typicall require no additiona hardware screws or clips. Solid wood backers are installed on the panels at 12" O.C. and are typically painted flat black - but custom finishes are avaailable per project specifications.

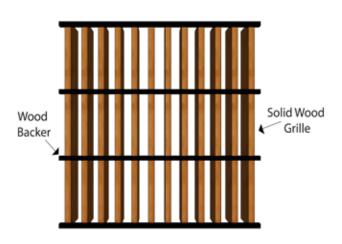

Our panels are nominal 2' wide by 2' or 4' long. Standard blade depth is typically 1-1/2" but can be customized based on the project specifications. The reveal at the panel edge matches the size of the 15/16" T-grid. Optional notched backers can provide more stability for wall installations with blades over 2" deep.

Soundtex and/or insulation can be added for greater NRC values. (See page 2 for NRC standard values).







NRC VALUES

NRC Value (with 1" encapsulated insulation) = 0.90 NRC Value (with 2" encapsulated insulation) = 1.00

CUSTOMIZATION

The RB Grille System can be custom manufactured in a variety of blade sizes, lengths, and widths, in any commercially available solid wood species or veneer color. Color-matching and custom finishes are also available.

STORAGE AND ACCLIMATIZATION

All Grille System material must be stored and installed only in a controlled interior environment (relative humidity range 25% - 55% maximum - temperature between 60° - 80° - not to exceed 86°). All windows, doors and wet work must be complete before installation. Material should only be installed after reaching equilibrium moisture content.

FIRE RATING

The RB Grille System Panels and components can be treated with Fire Retardant chemicals to achieve Class A fire rating compliance.

WARRANTY

All materials produced by Redbud Architectural Systems are guaranteed against manufacturing defects for one year from the date of delivery. *Due to the nature of wood stains, color matching can not be guaranteed.

